

Simple Cutre 5000 Spicemen preparation



Application

Precision cut specimens for the Taber®Rotary Abraser or Shear/Scratch Tester.

The Model 5000 Sample Cutter is designed to cut an exact 4.2 inch(107mm) diameter specimen and punch a 1/4inch (6.5mm) center hole. An optional pad allows you to cut materials in thickness up to 1/4 inch (6.5mm).

Rugged design incorporates safety features.

The rear support prevents tip over, thus eliminating the needto secure the instrument to a worksurface. A shielded punch shaftand knife retraction protect the operator from the center punch andcutting blade. The punch lever is ergonomically designed to evenlytransfer force through the spring loaded punch.

Prepare a wide range of products.

The heavy duty cutting blade works on a variety of materials including: paper, cardboard, rubber, leather, vinyl, linoleum, carpet, textiles, thin metals, flexible plastics, plus many others.

Standard Features

Rugged cast aluminium Dovetailed rear support Blade change-out access window Spring loaded punch Ergonomic handle Recessed blade and shielded punch drives

Interchangeable Pads:

0.187" (4.75mm) Upper Pad Assembly (*included) 0.250" (6.5mm) Upper Pad Assembly




Comercial: +34 902 42 00 82 SAT: +34 902 42 00 83 FAX: +34 943 82 01 57 e-mail: comercial@neurtek.es web: www.neurtek.com



Ordering

TA-985000 Sample Cutre 5000

Sample Cutre incluyes: Rear support Five (5) heavy-duty cutting blades 0.187" (4.75mm) Upper pad assembly Non-skid rubber feet

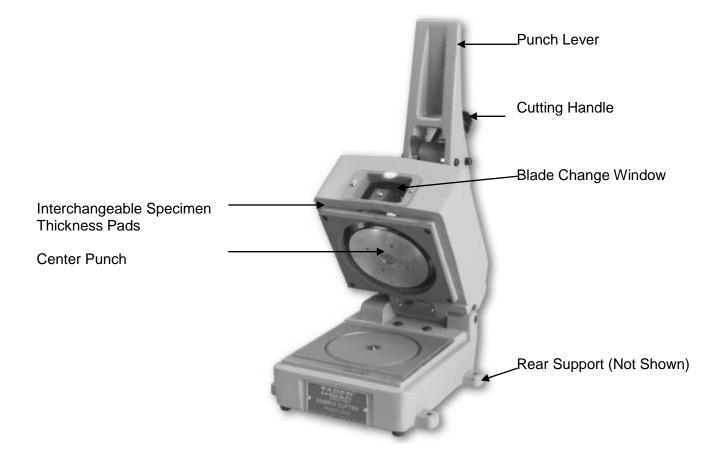



Comercial: +34 902 42 00 82 SAT: +34 902 42 00 83 FAX: +34 943 82 01 57 e-mail: comercial@neurtek.es web: www.neurtek.com