


# PosiTector<sup>®</sup> SST Soluble Salt Tester

Measures the concentration of soluble salts on metal surfaces

**NEURTEK**  
i n s t r u m e n t s

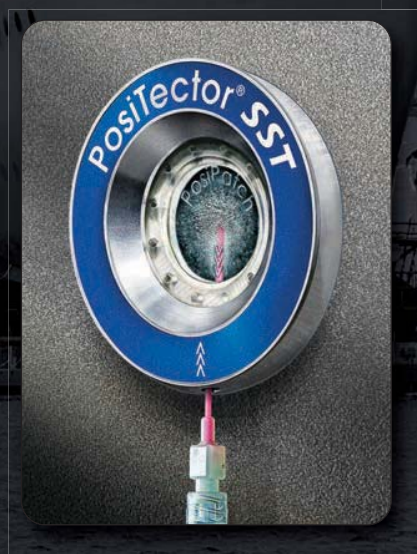

*Innovative PosiPatch™...*

- No adhesive residue
- Automatic air removal
- No sharps, no needles!

*For use with  
all Bresle patch  
types including  
PosiPatch*

**DeFelsko<sup>®</sup>**  
The Measure of Quality

 **Bluetooth<sup>®</sup>**  WiFi

Available on the  
**App Store**



[www.neurtek.com](http://www.neurtek.com)



# PosiTector<sup>®</sup> SST Soluble Salt Tester



## All Gages Feature...

### Simple

- Conductivity probe specifically designed for ISO 8502-6,9
- Displays test duration, sample temperature, conductivity ( $\mu\text{S}/\text{cm}$ ) and surface density ( $\text{mg}/\text{m}^2$  or  $\mu\text{g}/\text{cm}^2$ )
- Onscreen interface guides users through the Bresle test method
- Automatic storage of a background (blank) measurement — handy when performing multiple tests

### Durable

- Solvent, acid, oil, water and dust resistant—weatherproof
- Shock-absorbing, protective rubber holster with belt clip
- Two year warranty on gage body AND probe

### Accurate

- Long Form Certificate of Calibration showing traceability to NIST included
- Includes certified conductivity standard (calibration solution) to verify probe accuracy. Certificate included.
- Automatic temperature normalization and sample temperature reporting
- Conforms to national and international standards including ISO, NACE, SSPC, IMO and US Navy

### Versatile

- PosiTector body accepts all PosiTector SST, 6000, 200, RTR, SPG, DPM, SHD and UTG probes easily converting from a soluble salt tester to a coating thickness gage, surface profile gage, dew point meter, Shore hardness durometer or ultrasonic wall thickness gage
- Ideal for determination of water-soluble contaminants in non-metallic blast media
- A selection of kits include everything needed to retrieve and analyze the concentration of soluble salts on surfaces
- Adjustable for various patch volumes
- Selectable display languages
- High contrast reversible color LCD with backlit display
- Uses alkaline or rechargeable batteries (built-in charger)

### Powerful

- Tracks test duration in accordance with ISO 8502-6
- Screen Capture—save screen images for record keeping and review
- USB port for fast, simple connection to a PC and to supply continuous power
- Every stored measurement is date, time and temperature stamped
- Software updates via internet keep your gage current
- PosiSoft USB Drive—stored readings and graphs can be accessed using universal PC/Mac web browsers or file explorers. No software required.
- Includes PosiSoft suite of software for viewing and reporting data

## Select Standard or Advanced Features

### Standard Models

**Includes ALL features as shown above plus...**

- Storage of 250 readings—stored readings can be viewed or downloaded

### Advanced Models

**Includes ALL features as shown above plus...**

- Storage of 100,000 readings in up to 1,000 batches
- Batch annotation—add notes and change batch names with onscreen QWERTY keyboard
- WiFi technology wirelessly synchronizes with PosiSoft.net and downloads software updates
- Data transfer via USB to a PC or via Bluetooth Wireless Technology to a mobile device, PC or printer
- Store thickness, profile, environmental, wall thickness, hardness and salt contamination measurements in individual batches



### Easy 1-2-3 Bresle Test

**1**  
**Reference...**  
Fill the syringe with DI water. Take background reading.

**2**  
**Sample...**  
Inject water into patch. Start timer.

**3**  
**Record...**  
Withdraw, inject into PosiTector SST.

**Test duration** → 2:22  
**Sample temperature** → 25.0 °C  
**Soluble salt conductivity** → 30  $\mu\text{S}/\text{cm}$   
**Surface density of soluble salts (mg/m<sup>2</sup> or  $\mu\text{g}/\text{cm}^2$ )** → 36  
**Adjustable test volume** → 3.0 ml

**PosiSoft<sup>®</sup>**  
**FREE SOLUTIONS**  
for viewing,  
analyzing and  
reporting data:



US812 Bridge Approach

**ABC COMPANY**

Salt Test US812-SB

Created: 2016-09-15 15:56:49  
PosiTector Body S/N: 784293  
Probe Type: PosiTector SST  
Probe S/N: 285817

Summary		#	x	σ	i	t
Conductivity Δγ (uS/cm)		13	31.8	3.1	24	35
Surface Density ρA (mg/m <sup>2</sup> )		13	38.3	3.8	29	42

Readings									
#	γ	γ <sub>1</sub>	Δγ	ρA (mg/m <sup>2</sup> )	Duration	T <sub>1</sub> (°C)	T <sub>2</sub> (°C)	Volume (ml)	Time
1	2	26	24	29	2:20	26.4	26.4	3.0	2016-09-15 16:03:30
2	0	34	34	41	2:17	26.6	26.8	3.0	16:06:48
3	0	35	35	42	2:13	26.8	26.3	3.0	16:09:16
4	1	36	35	42	2:10	26.3	25.7	3.0	16:11:48
5	5	34	29	35	2:08	25.6	25.3	3.0	16:14:52
6	0	33	33	40	2:12	25.3	25.4	3.0	16:17:42
7	3	32	29	35	2:14	25.6	25.8	3.0	16:20:40
8	3	33	30	36	2:15	25.6	26.3	3.0	16:23:24
9	0	34	34	41	2:13	26.3	26.6	3.0	16:26:03
10	1	34	33	40	2:13	26.7	27.6	3.0	16:28:35
11	1	34	33	40	2:18	26.7	27.9	3.0	16:31:10
12	1	34	33	40	2:30	26.7	27.8	3.0	16:34:05
13	1	32	31	37	2:10	26.7	27.3	3.0	16:36:47

2



# PosiTector<sup>®</sup> SST Bresle Method Patch Options



## PosiPatch

Flexible patch with magnetic ring

- For measuring salt contamination in accordance with ISO 8502-6,9
- Magnetic ring attaches to steel with no residue to clean – ideal for flat surfaces and diameters in excess of 100 cm (40 in.)
- Automatic air removal through a watertight, air permeable membrane
- No sharps, no needles! Safe, flexible dispensing tip mates with PosiPatch
- Comparable price to latex patches
- Reusable patent-pending PosiPatch saves time and money
- Easy-to-use in any orientation

### Specifications

Test Area	1250 mm <sup>2</sup>
Test Volume	2.5 – 3 ml
Patch Diameter	44.4 mm (1.75 in.)
Magnetic Ring Diameter	66.9 mm (2.6 in.)
Background Contamination	< 3 mg/m <sup>2</sup>

### Innovative...

PosiPatch attaches to steel surfaces using a unique magnetic ring



## PosiPatch<sup>™</sup> Advantage...

Magnetic ring –no adhesive residue to clean

Reusable PosiPatch saves time and money

Automatic air removal through a watertight, air permeable membrane

No sharps! Safe, flexible dispensing tip



## DeFelsko Patch

Self-adhesive, polyurethane patches

- For measuring salt contamination in accordance with ISO 8502-6,9
- Low-tack adhesive for easy patch removal with no residue to clean
- Works on nearly any material or surface geometry
- Latex-free
- Lower cost than latex patch
- Easy-to-use in any orientation



### Specifications

Test Area	1250 mm <sup>2</sup>
Test Volume	2 – 3 ml
Dimensions	50 mm x 50 mm (1.97 in. x 1.97 in)
Background Contamination	< 5 mg/m <sup>2</sup>

## Latex Patch

ISO 8502-6 conforming latex patch with easy-open tabs and low-tack adhesive for easy removal



### Specifications

Test Area	1250 mm <sup>2</sup>
Test Volume	2 – 15 ml
Dimensions	52 mm x 52 mm (2.05 in. x 2.05 in)
Background Contamination	< 5 mg/m <sup>2</sup>

Ordering Guide	Gage/Probe Only	Kit P: PosiPatch Kit	Kit D: DeFelsko Adhesive Patch Kit	Kit L: Latex Adhesive Patch Kit
Probe Only <sup>1</sup>	PRBSST	SSTKITP	SSTKITD	SSTKITL
Standard Body + Probe <sup>2</sup>	SST1	SSTKITP1	SSTKITD1	SSTKITL1
Advanced Body + Probe <sup>2</sup>	SST3	SSTKITP3	SSTKITD3	SSTKITL3
Inclusions	<ul style="list-style-type: none"> <li>Nylon carrying case with shoulder strap (SST1 and SST3 only)</li> </ul>	<ul style="list-style-type: none"> <li>PosiPatch (5)</li> <li>Magnetic Ring</li> <li>Syringe and PlasticTip(2)</li> <li>500 ml DI Water</li> <li>Cup (5)</li> <li>Hard-shell Carrying Case</li> </ul>	<ul style="list-style-type: none"> <li>DeFelsko Adhesive Patch (25)</li> <li>Syringe and Needle (2)</li> <li>500 ml DI Water</li> <li>Cup (5)</li> <li>Hard-shell Carrying Case</li> </ul>	<ul style="list-style-type: none"> <li>Latex Adhesive Patch (25)</li> <li>Syringe and Needle (2)</li> <li>500 ml DI Water</li> <li>Cup (5)</li> <li>Hard-shell Carrying Case</li> </ul>
	<p><sup>1</sup> PosiTector SST Probe Only models come complete with: certified conductivity standard, foam swabs (5), Long Form Certificate of Calibration traceable to NIST, instructions, PosiSoft Software, two (2) year warranty.</p> <p><sup>2</sup> PosiTector SST Standard/Advanced Body + Probe models come complete with: protective rubber holster, certified conductivity standard, foam swabs (5), Long Form Certificate of Calibration traceable to NIST, belt clip, wrist strap, 3 AAA alkaline batteries, instructions, protective lens shield, USB cable, PosiSoft Software, two (2) year warranty.</p>			

**PosiTector SSTKITP1 shown**



**PosiTector SST Specifications**

Range	0 – 500 $\mu\text{S/cm}$ , 0 – 2000 $\text{mg/m}^2$ , 0.0 – 200.0 $\mu\text{g/cm}^2$
Resolution*	1 $\mu\text{S/cm}$ , 1 $\text{mg/m}^2$ , 0.1 $\mu\text{g/cm}^2$
Accuracy	+/- 2 $\mu\text{S/cm}$ (0 – 200 $\mu\text{S/cm}$ ) +/- 10 $\mu\text{S/cm}$ (201 – 500 $\mu\text{S/cm}$ )
Temperature Range	0 – 50° C (32 – 122° F)
Normalization Temperature	25° C (77° F)
Test Cell Volume	1 ml

\* Hi Res Mode 0.1  $\mu\text{S/cm}$  (0 – 200  $\mu\text{S/cm}$ )  
**SIZE:** 165 x 61 x 28 mm (6.5" x 2.4" x 1.1")  
**WEIGHT:** 140 g (4.9 oz.) without batteries

**PosiPatch Starter Kit (SSTKITPATCHP)**

For use with existing conductivity meters.

Try the revolutionary, reusable PosiPatch with a low cost trial pack.

**Includes:** PosiPatch (5) syringes (2) dispensing tips (2) and magnetic ring.



**Replacement Patches**

PosiPatch (5 pack)	SSTPATCHP5
PosiPatch (24 pack)	SSTPATCHP24
Magnetic Ring for PosiPatch	SSTRING
DeFelsko Adhesive Patch + needle (25 pack)	SSTPATCHD25
Latex Adhesive Patch + needle (25 pack)	SSTPATCHL25

**Consumables**

**Plastic Dispensing Tips** (10 pack) — for use with the PosiPatch

**Needles** (10 pack) — for use with adhesive patches

**3 ml syringes** (10 pack) — for use with dispensing tips and/or needles

**30 ml Cups** (10 pack) — sterile, single-use cups ensure measurement accuracy

**Certified Conductivity Standard** (60 ml, 2 oz.) — 84  $\mu\text{S/cm}$  calibration solution

**Deionized Water** (240 ml, 8 oz.) — purified, ion-free water

**Foam Swabs** (5 pack) — for cleaning the probe's test cell

Conforms to ISO 8502-6/8502-9, US Navy NSI 009-32, US Navy PPI 63101-000, AS 3894.6, IMO MSC.215(82), IMO MSC.244(83), SSPC Guide 15, ISO 11127-6, ASTM D4940

© DeFelsko Corporation USA 2016. All Rights Reserved. Technical Data subject to change without notice. • Printed in USA • PSST.v.LW/W1609

**DeFelsko**<sup>®</sup>  
The Measure of Quality

  
Made in U.S.A.