

# Wheel Refacer 250

**TABER**<sup>®</sup>  
INDUSTRIES  
ISO 9001 REGISTERED


Taber<sup>®</sup> Abraser Wheel Resurfacing

## Resurface Taber abrading wheels with precision.

The Model 250 Wheel Refacer is recommended to refresh the contact surfaces of Calibrade<sup>®</sup> wheels. This instrument can also be used to true out of round wheels and correct 'crowning' conditions on both Calibrase<sup>®</sup> and Calibrade<sup>®</sup> wheels.

## Rugged design is built to last.

The refacing diamond is mounted in an adjustable diamond tool holder, which is supported on a shielded traverse slide. Abrading wheels are mounted on a flanged extension of the motor shaft. A durable, cast housing provides ample weight to prevent chatter during operation. Attaching the Taber Abraser vacuum unit hose to the rear receptacle draws off abrasive cuttings.

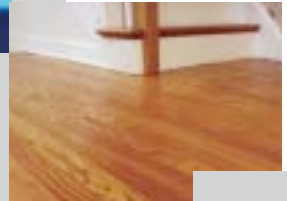

**NEURTEK**  
i n s t r u m e n t s



# Wheel Refacer 250



i n s t r u m e n t s

## Taber® Abraser Wheel Resurfacing

### Standard Features:

- Hinged wheel guard with safety off sensor
- Plugs into accessory receptacle on Taber Rotary Abraser
- Replaceable diamond tools
- Shielded traverse slide
- Feed screw crank

CE

### Available Accessories:


- Single Point Diamond Tool
- Multiple Point Diamond Tool (use for H-38 wheels)



Lock Nut

Diamond Tool

Safety off Sensor

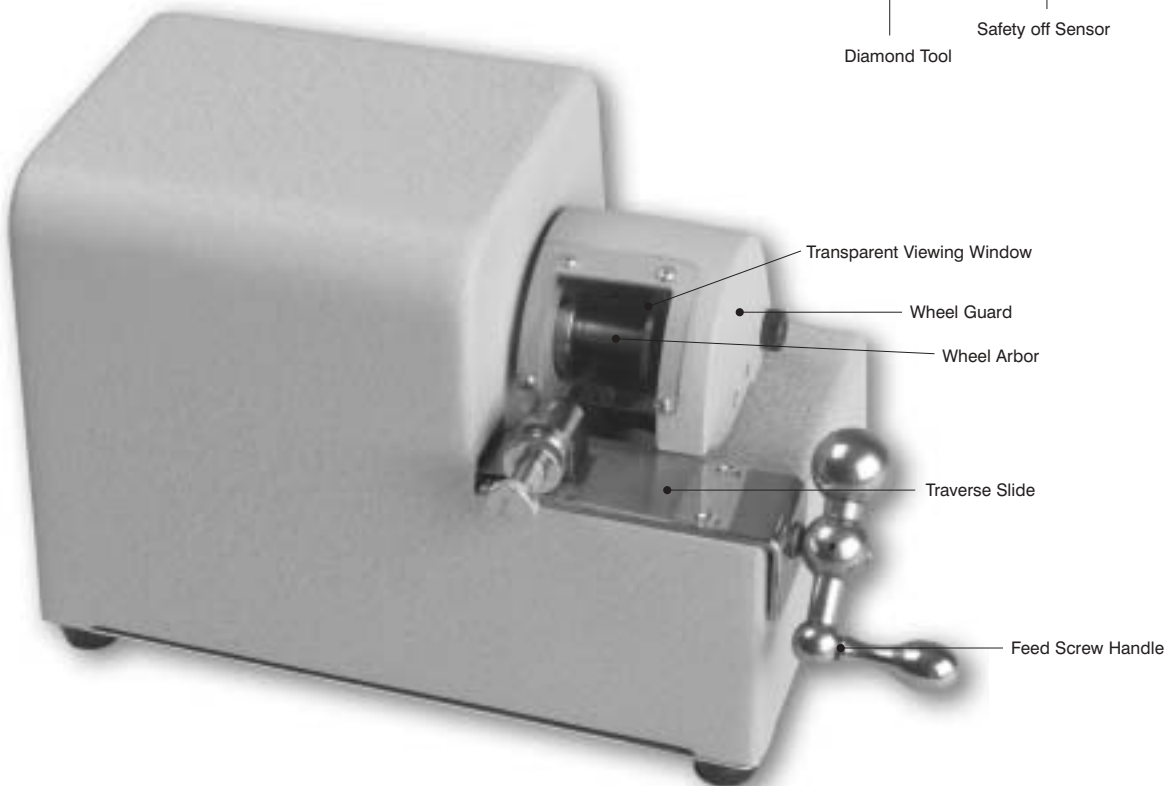

**TABER**  
INDUSTRIES

Setting the Industry Standard

**NEURTEK**

Políg.Ind.Azítain, Parcela 3 A ☒ Apdo.399 20600 EIBAR SPAIN ☎ 902 42 00 82 FAX 943 82 01 57  
Emails: comercial@neurtek.es sat@neurtek.es Web: www.neurtek.com