

Reciprocating Abraser 5900

TABER[®]
INDUSTRIES
ISO 9001:2000 CERTIFIED

Wear and Scratch Testing

Unique design ensures simple instrument set-up.

Test specimens are mounted to a sliding platform that moves in a horizontal, reciprocating motion under a stationary tool holder. A counterweight enables the operator to balance the test arm prior to applying the test load, thus ensuring the exact load will be applied. An adjustable gantry allows the test system to be positioned according to the height of the specimen. Test parameters such as stroke length, speed, and load are adjustable.

Optional attachments provide versatility to satisfy numerous test requirements.

Incorporated at the end of the test arm is a tool holder to which optional attachments and weights are secured. Ideal for flat surfaces, the Taber Reciprocating Abraser can be configured to evaluate the susceptibility of a material surface to abrasion, scratch, scrape, rub, plus many other physical properties. With optional accessories based on GM test methods, this apparatus will also test the abrasion resistance of textile specimens using various friction media.

Maximize testing time with extra test arm assembly kits.

Using additional test arm kits (sold separately), the Taber Reciprocating Abraser can test up to three specimens simultaneously to increase technician output or compare different product formulations at the same time.



NEURTEK
i n s t r u m e n t s



NEURTEK

Políg.Ind.Azitaín, Parcela 3 A ✉ Apdo.399 20600 EIBAR SPAIN ☎ 902 42 00 82 FAX 943 82 01 57
Emails: comercial@neurtek.es sat@neurtek.es Web: www.neurtek.com

Reciprocating Abraser 5900

Wear and Scratch Testing

Standard Features:


Adjustable stroke length (6 mm to 155 mm)
Variable stroke speed (3 – 75 cycles per minute)
Test load (1N – 24N with optional weight discs)
Variable height adjustment (130 mm maximum)
Wearaser® Collet for vitrified or resilient Wearasers
Counterweight balanced
Programmable up to 999,999 cycles
115V/230V switchable **CE**

Optional Accessories (sold separately):

Additional Testing Arm Kit
Wide selection of abrasants:
 Calibrase® CS-8, CS-10F, CS-10, CS-17
 Calibrade® H-10, H-18, H-22, H-38
Scratch Tips (various configurations)
Multi-Mar Scratch Attachment (45° or 90°)
Universal Attachment
ScotchBrite® Abrasive Pad Kit
Pencil Hardness Scratch Kit
Jumbo Wearaser Collet
Scratch Claw Kit
GM Abrading Accessories

Reciprocating Abraser Includes:

Testing Arm Assembly (1 set)
Weight Set, 6 Piece (1N, 2N, 2.5N, 5N, 10N, 24N)
Stainless Steel Wearaser Collet
CS-10 Wearasers (pkg. 10)
H-18 Wearasers (pkg. 5)
Wearaser Depth Gauge Tool
S-14 Refacing Strips (pkg. 50)
Specimen Clamp (set of 2)
Hex L-Key (set of 6)
Hand Brush

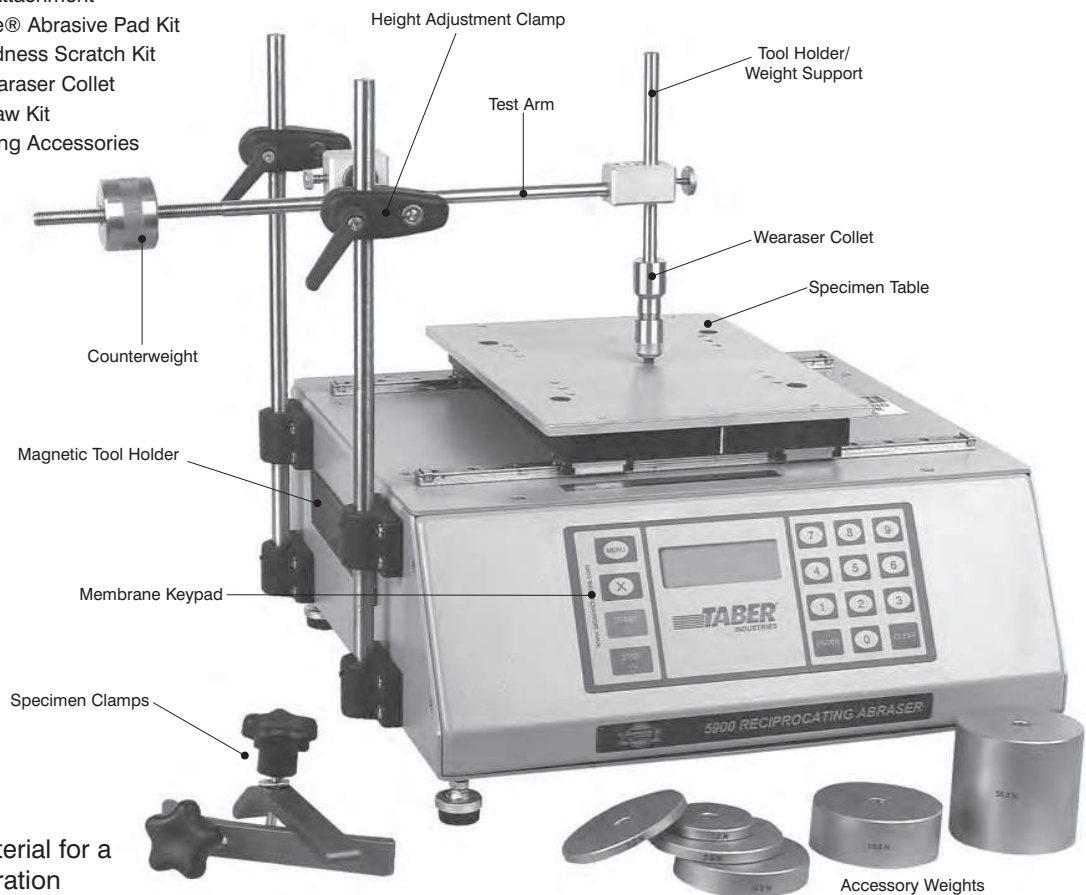

Send us your material for a product demonstration

TABER
INDUSTRIES

Setting the Industry Standard

455 Bryant Street
North Tonawanda, New York 14120 USA

NEURTEK
i n s t r u m e n t s